
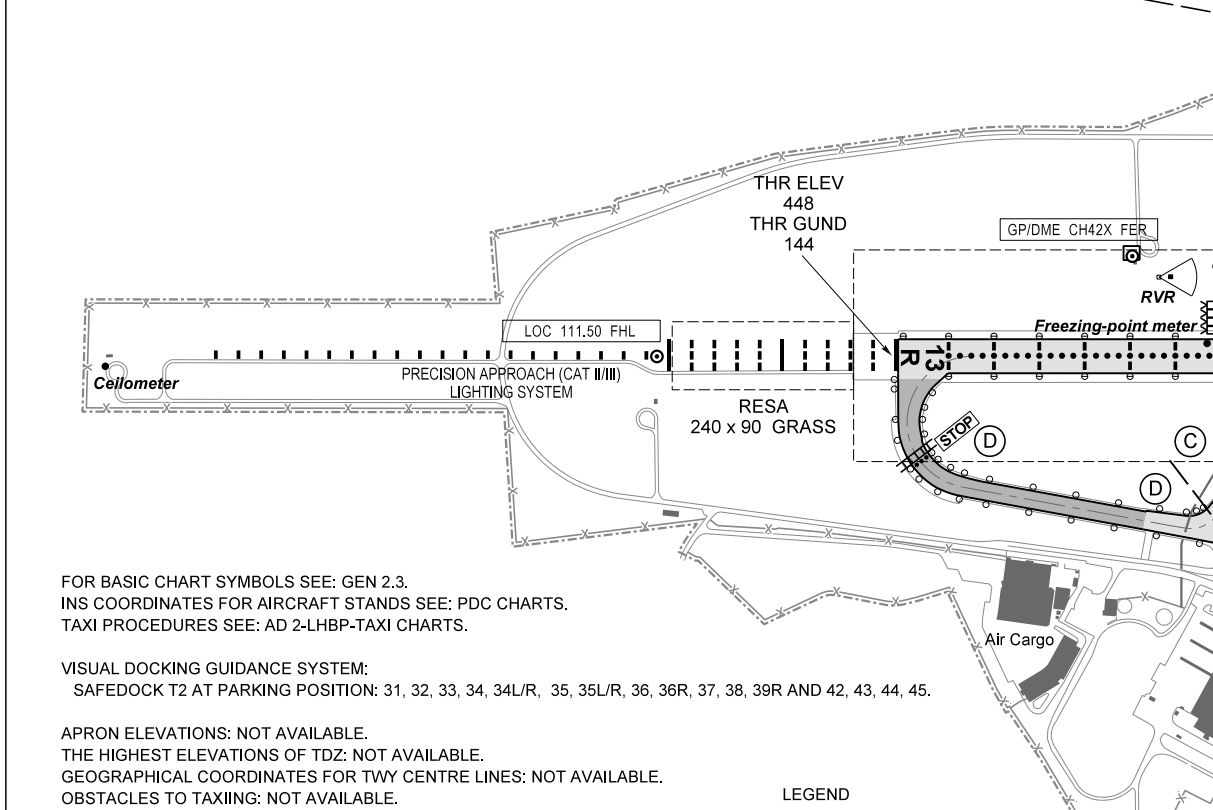
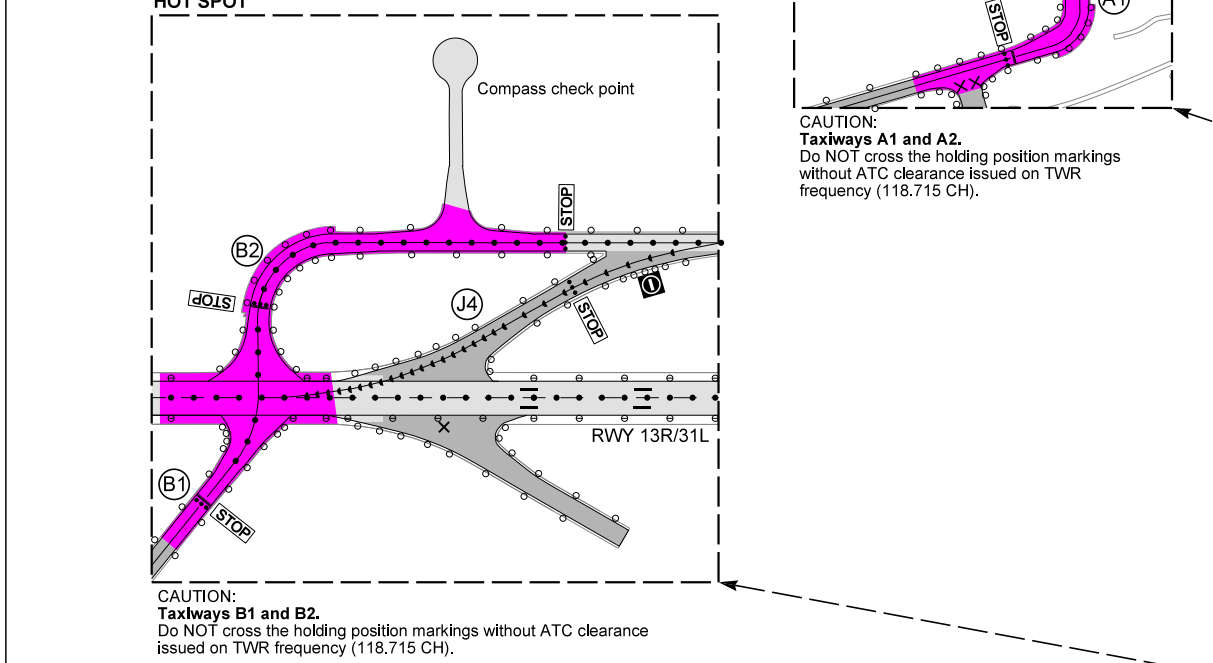


AERODROME CHART - ICAO

RWY	DIRECTION	THR	BEARING STRENGTH	TORA	TODA	ASDA	LDA
13R	127°	N47 26 55, E019 13 15	PCN 75/R/A/X/T	3009	3009	3009	3009
31L	307°	N47 25 50, E019 15 01	PCN 75/R/A/X/T	3009	3009	3009	3009
13L	127°	N47 26 44, E019 15 27	PCN 90/R/A/X/T	3707	3707	3707	3707
31R	307°	N47 25 23, E019 17 38	PCN 90/R/A/X/T	3707	3707	3707	3707

APRON 1, APRON AG	PCN 60/R/A/X/T
APRON 2	PCN 90/R/A/X/T
APRON AA, APRON AL	PCN 75/R/A/X/T
CARGO APRON	PCN 80/R/A/W/T

For taxiways width, surface and strength see: LHBP AD 2.8.

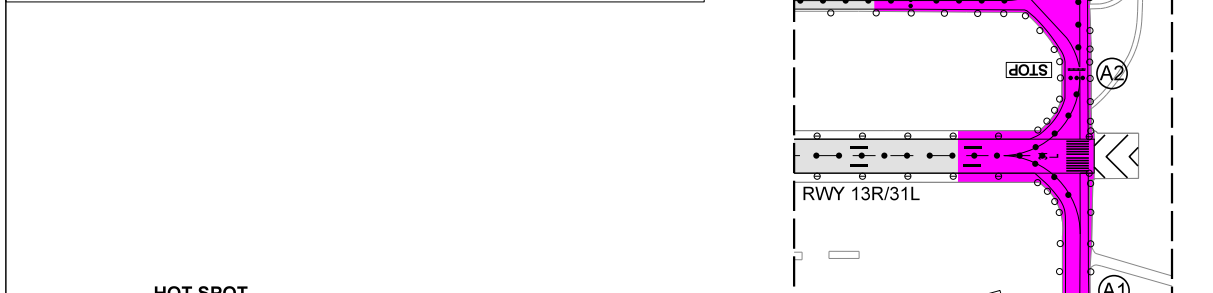

INTERSECTION TAKE-OFF				
RWY	TWY	TORA	TODA	ASDA
13L	K	2950	2950	2950
31R	V	2650	2650	2650
13R	C	2450	2450	2450
	B1	1200	1200	1200
	B2	1200	1200	1200
31L	B1	1800	1800	1800
	B2	1800	1800	1800

SEE ALSO LHBP AD 2.13 DECLARED DISTANCES

THIS PAGE IS INTENTIONALLY LEFT BLANK